



ACRYLIC



NEW

• Indoor and outdoor signage applications


- Glossy finish
- Excellent for clear signage
- Laser and rotary engravable
- For indoor and outdoor use

Specifications

Surface	Glossy
Composition	Acrylic
Full sheet	600 mm x 600 mm (23" x 23")
Half sheet	600 mm x 300 mm (23" x 11.5")
Quarter sheet	300 mm x 300 mm (11.5" x 11.5")

Capabilities

Interior	■	■	Exterior
Shear			Saw
Silk screen	■	■	Hot stamp
Scratch resistant	■		Flexible
Break resistant	■		UV resistant
Min. temp.	-40°C	80°C	Max. temp.

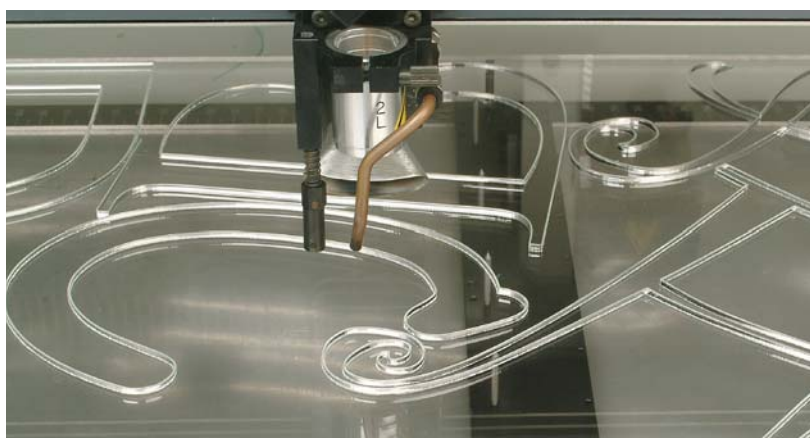

Range of cast acrylics.
Suitable for rotary engraving and colouring techniques.

Clear acrylic

Thickness	Part number
3 mm (1/8")	48300
5 mm (.20")	48301
10 mm (.40")	48302