




GRAVOXAL[®] PREMIUM

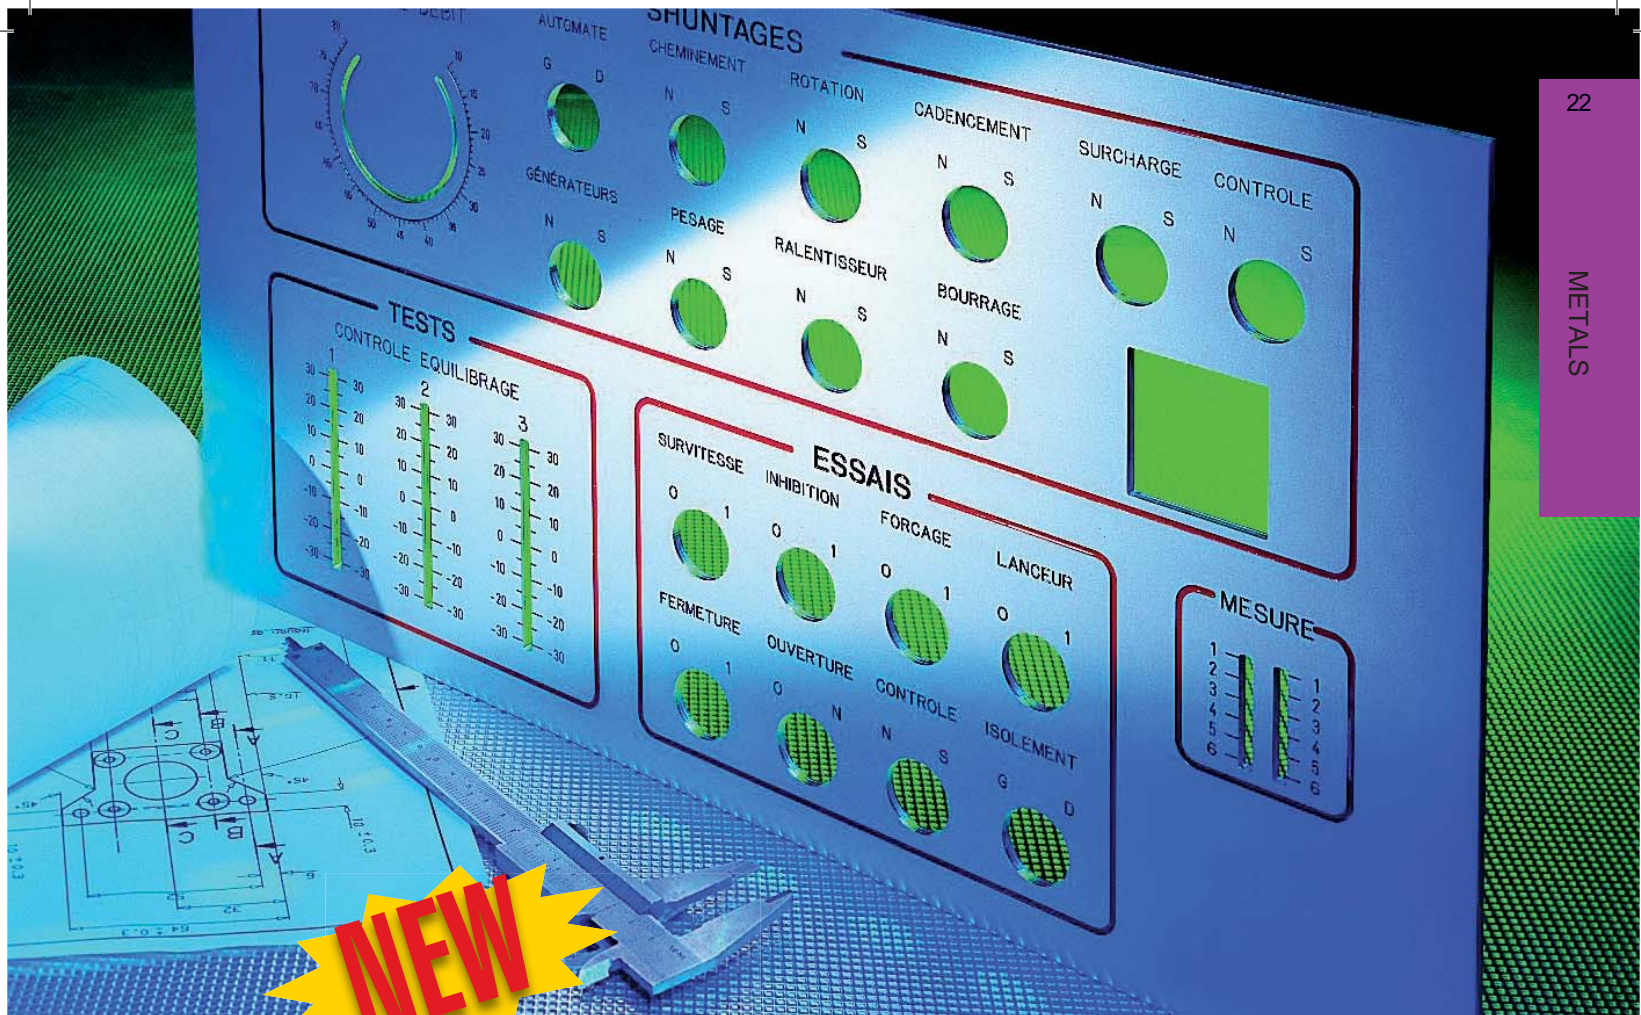

- Control panels
- Legend plates
- Award plaques
- Signage

- Double sided anodised aluminium
- Rotary or laser engraving

Specifications

Surface	Matt or Glossy
Composition	Aluminium
Profile engraving depth	0.1 mm (.004")
Full sheet	1000 mm x 500 mm (39" x 19")
Other size	2000 mm x 1000 mm (78" x 39")

Capabilities

Interior	■	■	Exterior
Shear	■	■	Saw
Silk screen	■	■	Hot stamp
Scratch resistant	■		Flexible
Break resistant	■	■	UV resistant
Min. temp.	-40°C	100°C	Max. temp.

Matt

		1.0 mm	1.5 mm	2.0 mm
	Surface colour	.04"	1/16"	1/12"
○	champagne	18360	18372	18383
●	red	18354	18366	18377
●	green	30538	30540	30542
●	blue	18356	18368	18379
●	silver	18350	18362	18374
●	gold	18358	18370	18381
●	bronze	30532	30534	30536
●	black	18352	18364	22056

Glossy

		1.0 mm	1.5 mm	2.0 mm
	Surface colour	.04"	1/16"	1/12"
○	champagne	18555	18561	18567
●	red	18552	18558	18564
●	green	30521	30522	30523
●	blue	18553	18559	18565
●	silver	18550	18556	18562
●	gold	18554	18560	18566
●	bronze	30524	30526	30530
●	black	18551	18557	18563

All colours are anodised on both sides during the continuous anodisation process. Protective film on both surfaces.* Laser engraving on coloured material. Quality of engraving may vary depending on the colour. Use Gravolaque to colour any Gravoxal engraving. Aloxide may be used to colour Glossy finish. See p.36.